

# SERVER ENVIRONMENT MONITOR

rackable unit for monitoring and manage server environment


## SEM 3010



- ❖ Temperature
- ❖ Voltage
- ❖ Intrusion
- ❖ Dray contacts
- ❖ Video surveillance
- ❖ Audio surveillance
- ❖ History graphs
- ❖ Raw data logging & preview

Ensuring secure and healthy environment suitable for demanding server operation is becoming increasingly important, which is why SHONESY develop a variety of SEM applications. SEM 3010 is hi-end solution packed in rackable case, network ready with inbuilt storage for data logging is self-sustained device. SEM 3010 comes with client

manager that provide data visualization and remote control. For Alarming purposes device is GSM-Modem and E-Mail ready. Various types of sensors can be attached for enabling monitoring and data logging. In addition SEM 3010 can be used to remotely control number of external devices.

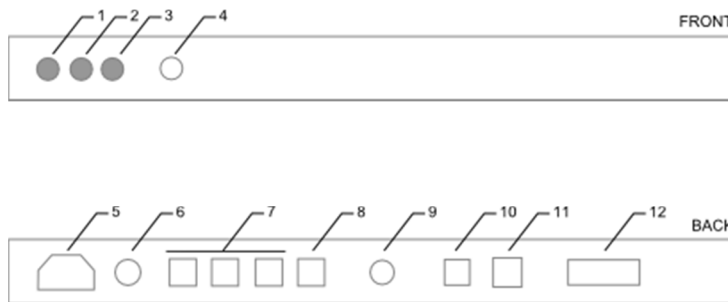

1. Power LED
2. Message LED
3. Function LED
4. Service control button
5. Power plug
6. Fuse
7. Voltage sensor SEM SV1 only
8. Temperature sensor SEM ST1 only
9. Computer logic on/off
10. USB extensions (GSM Modem)
11. LAN
12. Dry contacts

### Technical data

<b>Rated voltage</b>	200-240V
<b>Rated frequency</b>	50/60 Hz
<b>Interfaces</b>	LAN
<b>Operating ambient temperature</b>	0 to 45°C
<b>Relative humidity</b>	5% to 90% without condensation
<b>Dimensions W x D x H</b>	430x300x42
<b>Weight</b>	4 kg